




Controller Wiring



PSD 55 – QUATTRO – UT 15 – Automatic w/limitation (EB-C) – Multiple convectors/thermostat

—	L	Live
—	N	Mains 230 VAC Neutral
—	PE	Ground
—	+ / UAC	Convactor power input (24 VDC, 12VDC, 12VAC)
—	- / 0V	
—	GND	Common ground for control voltages
—	A/Ur	Control voltage 0 – 10 V DC
—	COOL	Heat (0 V) / Cool (10 V) regime trigger
—	+10 V	Reference voltage output (i.e. for use with floating contacts)

Dashed lines are optional (enabling optional capabilities, i.e. heating/cooling trigger)

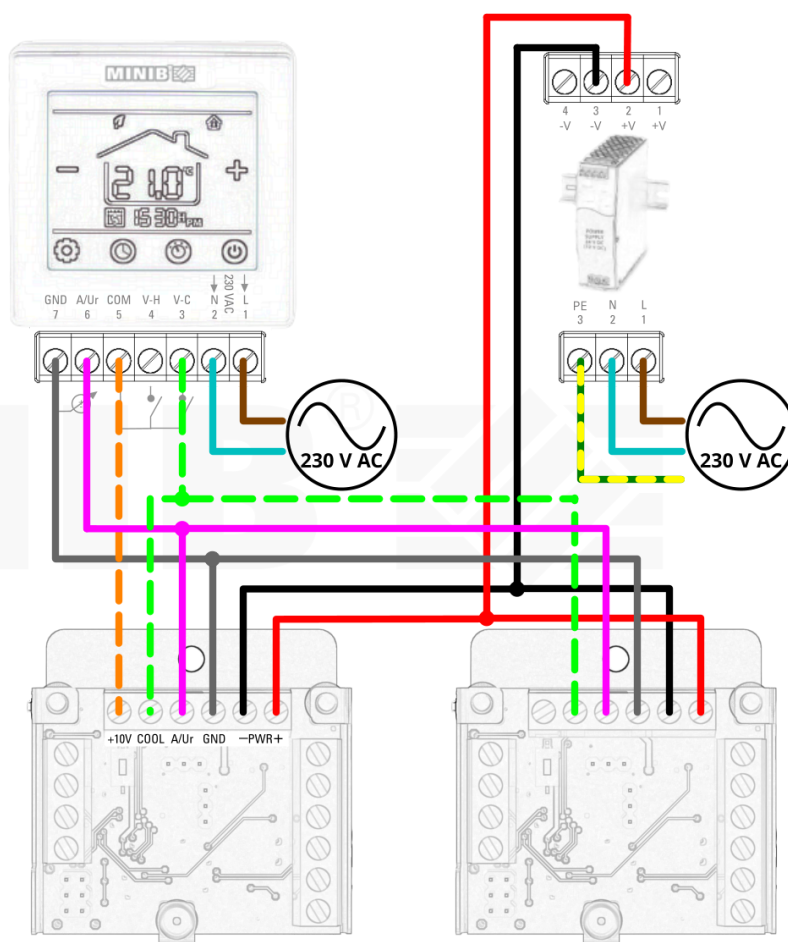

MINIB[®]

... more than just heat

© MINIB, a.s. 2022

PRODUCTS

Floor convectors

Free-standing convectors

Wall convectors

Chilled beams

Accessories

SERVICES

Custom design



Controller Wiring



On site measurements

Service

COMPANY

About us

Contacts

Jobs